


# WATERING MADE EASY SPRINKLER STATION STEP BY STEP INSTALLATION GUIDE

## What you'll need:

### 1. Watering Made Easy Kit

- a. Sprinkler assembly
- b. Female "quick connect"
- c. Connection Protection Shell and Cover
- d. Twine for determining sprinkler location
- e. Layout Guide and Installation Instructions

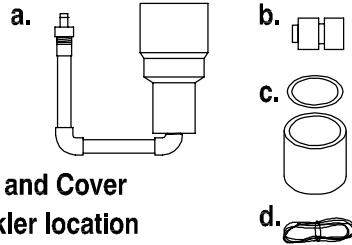

1-877-280-4485

WateringMadeEasy.com

For Customer Service, please call 1-877-280-4485 or email [help@WateringMadeEasy.com](mailto:help@WateringMadeEasy.com)

\* IF ANY OF THE ABOVE ITEMS ARE DAMAGED OR NOT INCLUDED IN THE BOX, PLEASE CALL 1-877-280-4485 AND WE WILL CORRECT THE PROBLEM IMMEDIATELY.

### 2. Shovel

### 3. Hand shovel/trowel

### 4. Pea gravel (not required for the Jr. Or Squared models)

### 5. Extra dirt to fill the hole, if needed

### 6. Garden hose

Assembled in the USA ©Watering Made Easy 2003 - Patent Pending



## 1. Decide where you would like to install the sprinkler.

Use the twine and the Layout Guide included with this kit to help you plan.

Dig a hole in the lawn where you would like the sprinkler.

Use the Sprinkler and Connection Protection Shell as a guide to determine the size and depth of the hole.

**DO NOT LOCATE HOSE CONNECTION IN PATH OF SPRINKLER SPRAY**

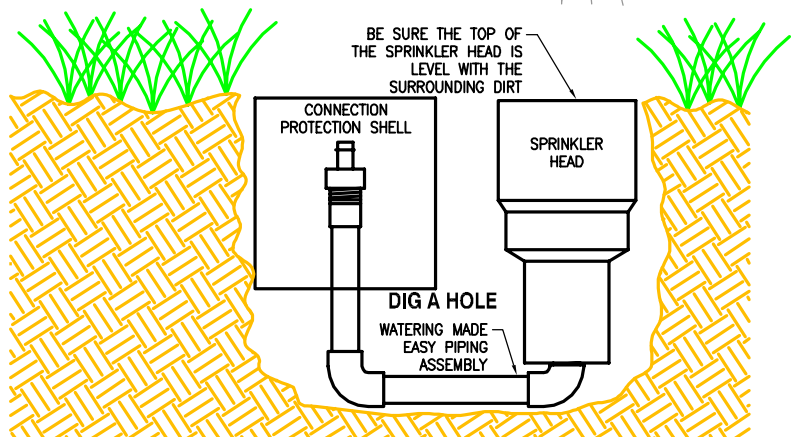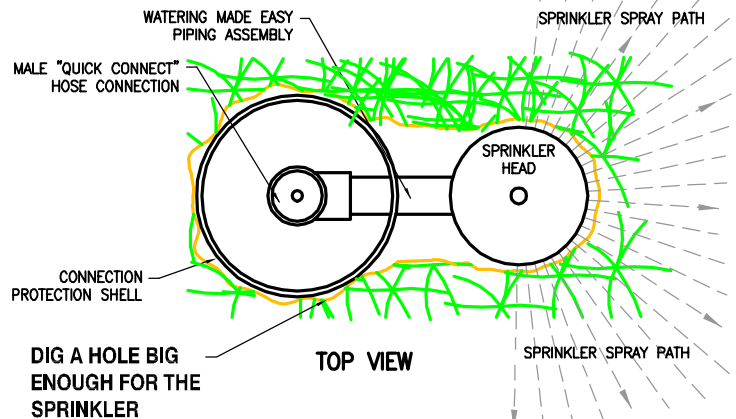


# WATERING MADE EASY SPRINKLER STATION STEP BY STEP INSTALLATION GUIDE

**2.** Place the sprinkler into the hole. Fill the hole with about 3 inches of dirt and pack the dirt tightly. Add 3 inches of gravel on top of the dirt.

Do not allow dirt to fall into the hose connection.

Ensure that the sprinkler is not leaning excessively in any direction.


**\*** THE SPRINKLER STATION JR. AND SQUARED DO NOT REQUIRE GRAVEL. SIMPLY FILL THE HOLE HALFWAY WITH DIRT AND PACK THE DIRT TIGHTLY.

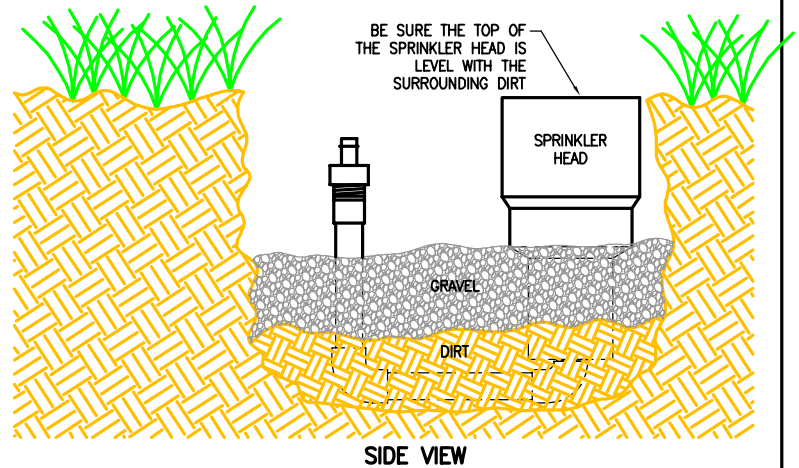

**3.** Center the connection protection shell around the hose connection, level with the surrounding dirt.

The connection protection shell cover fits tighter on one end of the connection protection shell than the other. The preferred orientation is with the looser side up, however, either orientation will work.

Fill the hole, including inside the connection protection shell with another inch of dirt and pack tightly. Top off the inside of the connection protection shell with about 1/2" of gravel and place the top on the connection protection shell.

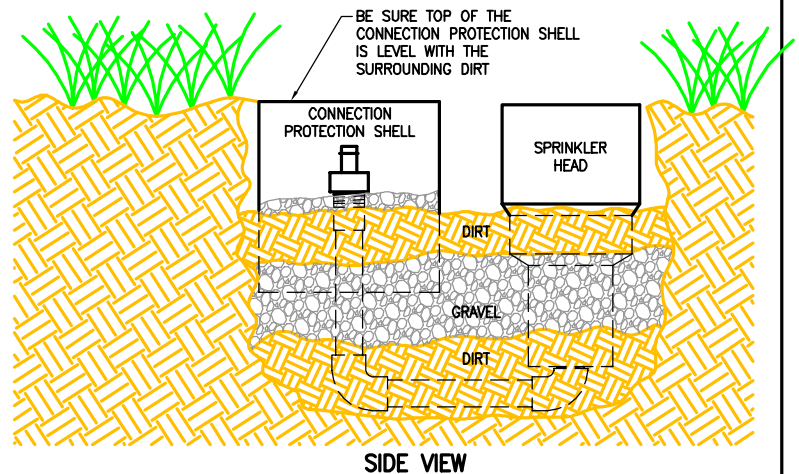

# WATERING MADE EASY SPRINKLER STATION STEP BY STEP INSTALLATION GUIDE



Page 3 of 4.

**4. Fill the hole the rest of the way with dirt and pack tightly.**

**\*DO NOT FILL THE CONNECTION PROTECTION SHELL WITH DIRT!**

**\*PACK DIRT ALL THE WAY AROUND THE SPRINKLER HEAD AND THE CONNECTION PROTECTION SHELL.**

**\*PACK THE DIRT TIGHTLY. YOU CAN STEP ON THE DIRT AROUND THE SPRINKLER TO PACK IT.**

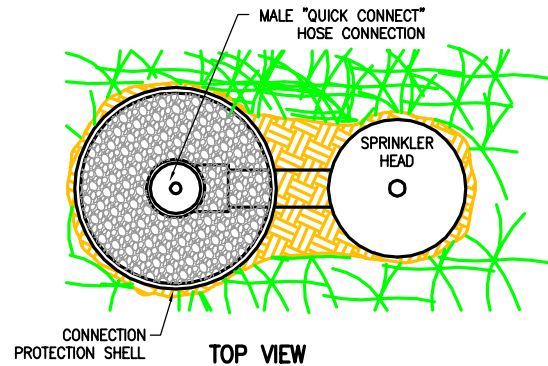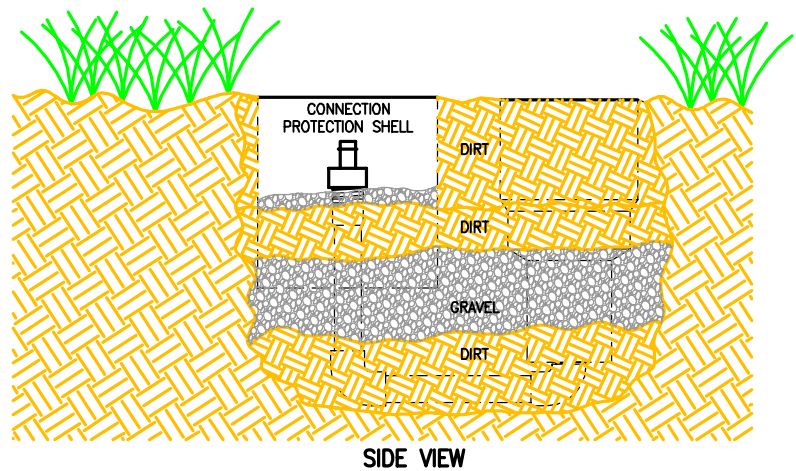

**GRASS WILL GROW!**



NEWLY INSTALLED



3 WEEKS LATER




BEFORE YOU KNOW IT!

# WATERING MADE EASY SPRINKLER STATION STEP BY STEP INSTALLATION GUIDE

**5.** Attach the female "quick connect" hose connection to your garden hose.

Turn on the water to the hose. The automatic shut off will not allow the water to flow.

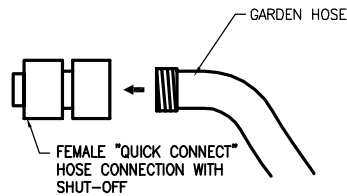

**6.** Plug your garden hose with the female "quick connect" into the sprinkler male "quick connect". The sprinkler will pop up and begin to spray water on your lawn!

**\*STAND WHERE THE HOSE CONNECTION IS BETWEEN YOU AND THE SPRINKLER HEAD TO AVOID GETTING SPRAYED.**

### THE ORIGINAL SPRINKLER STATION:

While the head is spraying, rotate the clips just under the spray nozzle to adjust the spray direction and the angle that the nozzle travels before it turns around and goes back the other way\*\*. Rotate the diffuser pin on the nozzle to reduce the spray distance and diffuse the stream.


### THE SPRINKLER STATION JR.:

While the head is spraying, turn the gray top to adjust the spray angle\*\*. Turn the screw on the top of the sprinkler to adjust the spray distance.

**\*\*MAX 340 DEGREE ANGLE RECOMMENDED TO AVOID GETTING SPRAYED WHEN TURNING ON AND OFF THE SPRINKLER AS WELL AS TO AVOID INTERFERENCE FROM THE HOSE.**


### THE SPRINKLER STATION SQUARED:

While the head is not spraying, unscrew the cap at the top of the sprinkler. Pull up the nozzle and turn the gray top to the desired setting. Turn the screw on the top of the sprinkler to adjust the spray distance.

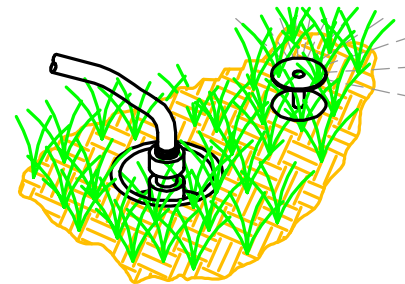

**7.** Unplug the hose to let the sprinkler head collapse to ground level. The automatic shut off stops the water flow while you walk to the next sprinkler or to turn off the water and store the hose.

Place the cover on the connection protection shell when the sprinkler is not in use...

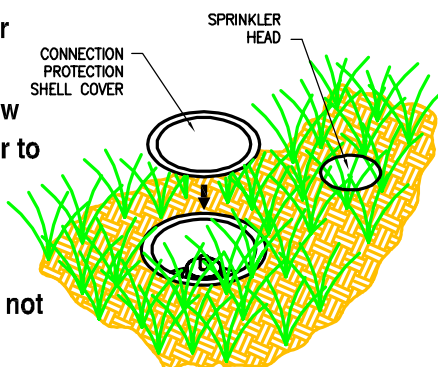

### Warranty

Watering Made Easy Sprinkler Stations carry a replacement warranty for five years from date of purchase with receipt. Watering Made Easy will replace the product if it is found to have a manufactured defect due to material or workmanship. This warranty does not extend to damage due to misuse, neglect or abuse, debris/sandy water, freezing, normal wear and tear, or accident. Under no circumstances will Watering Made Easy be liable for incidental or consequential damages. All implied warranties are limited in duration to five years following purchase. Depending on the state you reside in, the above limitations may not apply to you. If any problems arise with a Watering Made Easy Sprinkler Station please call toll free 1-877-280-4485.

Sprinkler Stations Installed in freezing climates require "Winterizing" to prevent damage by water freezing and expanding inside of the sprinkler. The 7-10 ounces of water that remains in the sprinkler after use must be pumped out before it can freeze and damage the sprinkler. We offer a "Winterizer Kit" that includes a pump to remove the water and a small plug to place in the hose connection to prevent new water from entering, or you may choose to use your own method to remove the water.